





等重企布業仁有限公司
TEL : 02 - 28577979 FAX : 02 - 28579292


Type H











Type Z




Type F



Type C

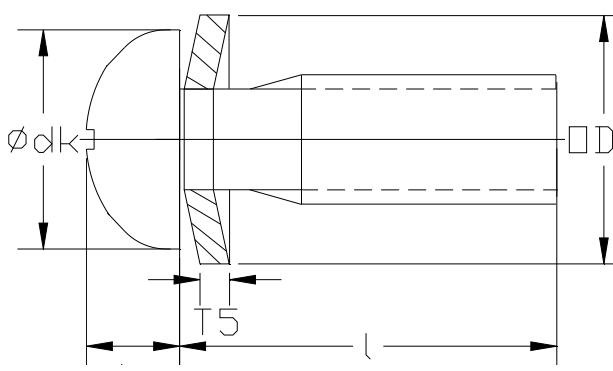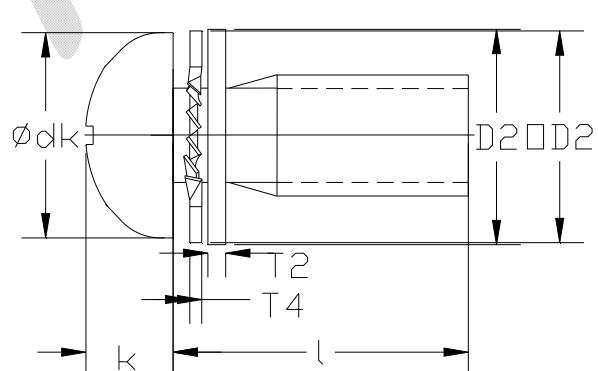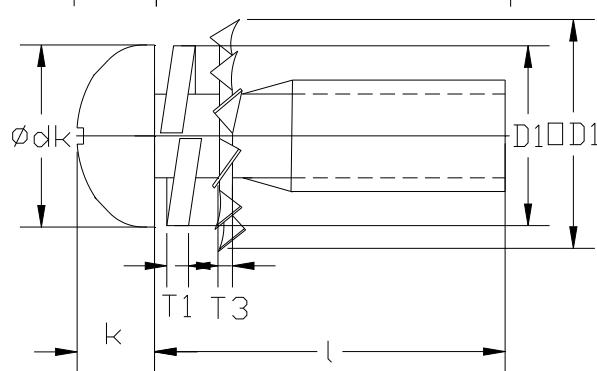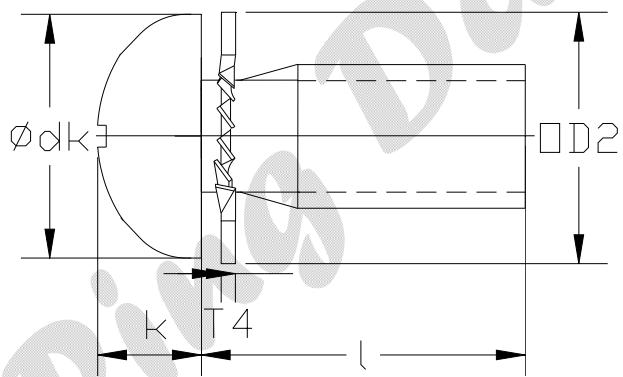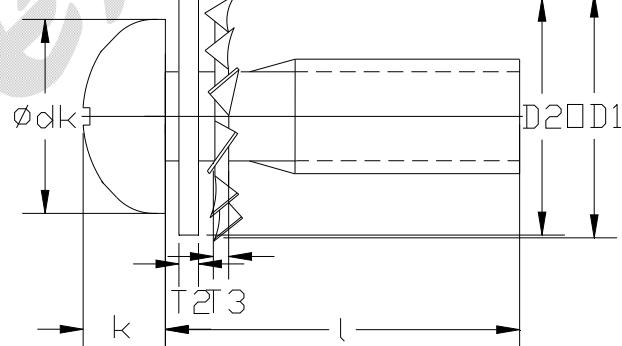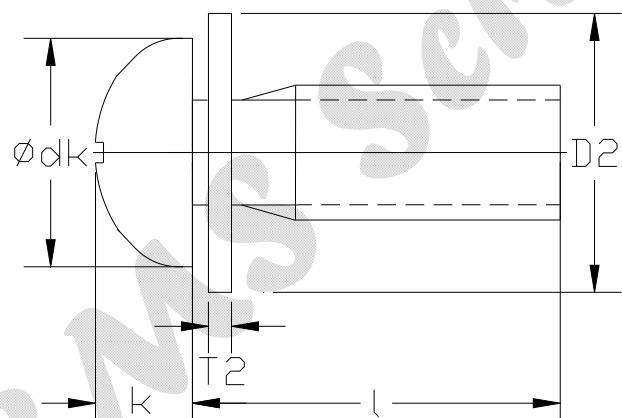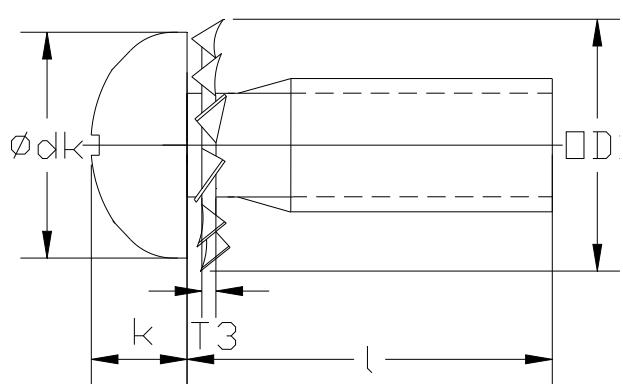

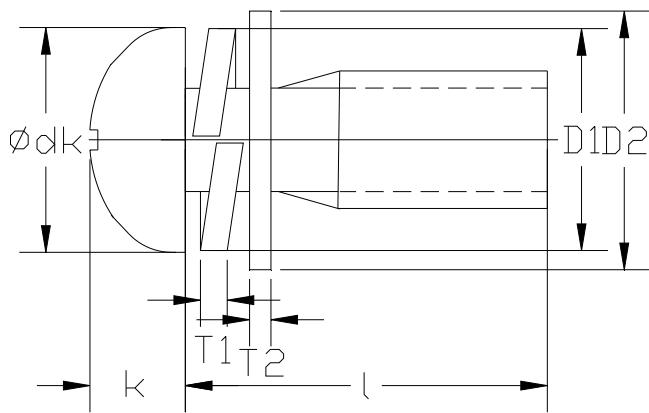

(d)		ST 2.2	ST 2.9	ST 3.5	ST 4.2	ST 4.8	ST 5.5	ST 6.3
d _k	max.	4	5.6	7	8	9.5	11	12
	min.	3.7	5.3	6.64	7.64	9.14	10.57	11.57
k	max.	1.6	2.4	2.6	3.1	3.7	4	4.6
	min.	1.4	2.15	2.35	2.8	3.4	3.7	4.3
Cross recess	m ref.	1.9	3	3.9	4.4	4.9	6.4	6.9
	Type H Penetration min.	0.85	1.4	1.4	1.9	2.4	2.6	3.1
	max.	1.2	1.8	1.9	2.4	2.9	3.1	3.6
y ref.	m ref.	2	3	4	4.4	4.8	6.2	6.8
	Type Z Penetration min.	0.95	1.45	1.5	1.95	2.3	2.55	3.05
	max.	1.2	1.75	1.9	2.35	2.75	3	3.5
y ref.	Type C	2	2.6	3.2	3.7	4.3	5	6
	Type F	1.3	2.1	2.5	2.8	3.2	3.6	3.6

附註：

- 參考 DIN 7981
- V 型外齒參考 DIN 6797