


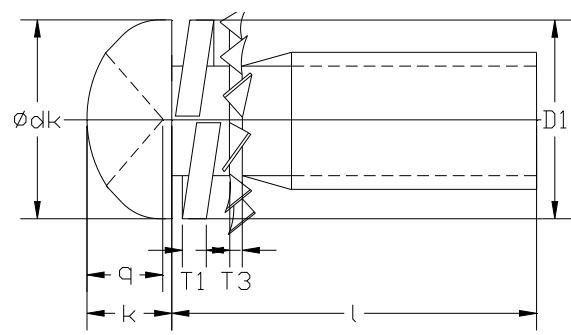
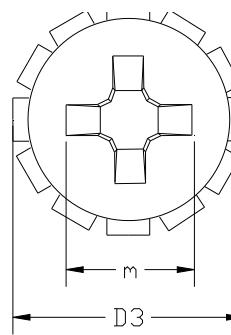
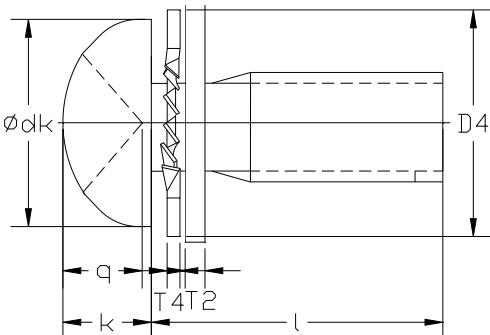
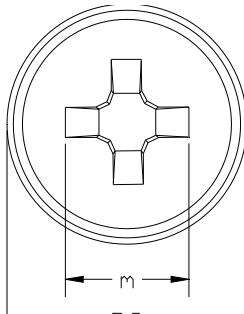
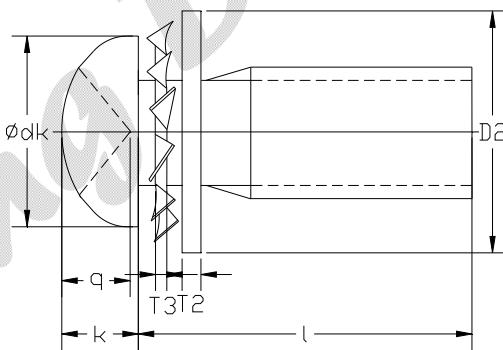
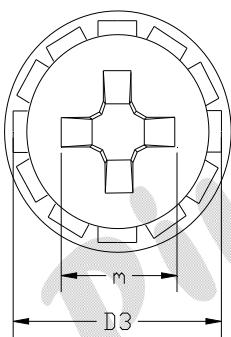
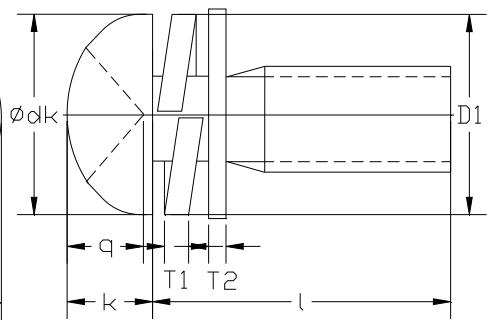
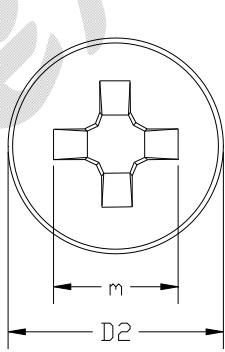
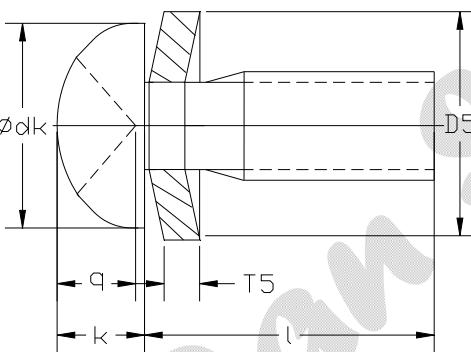
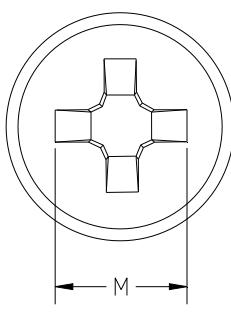
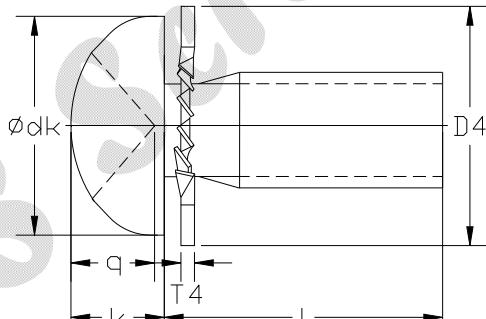
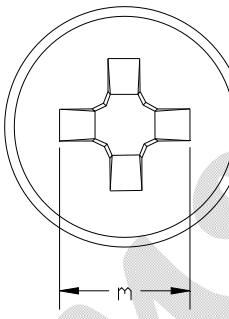
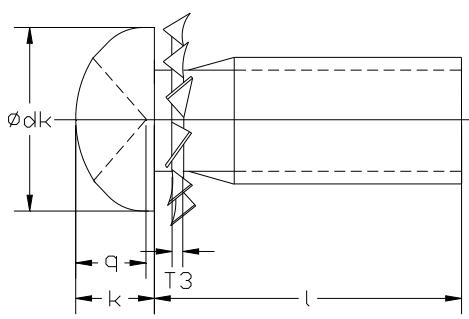
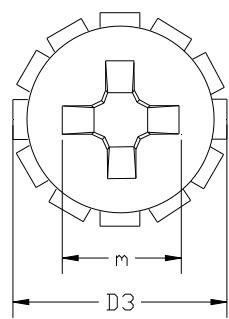
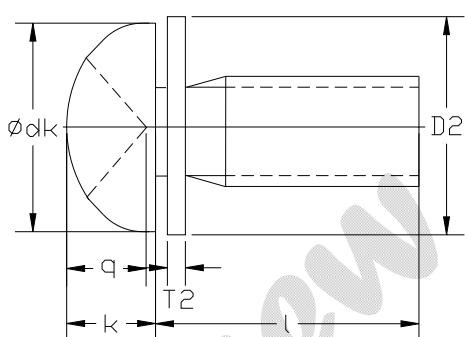


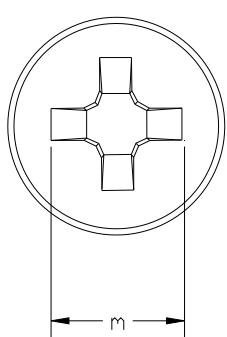

等重企布業仁有限公司
TEL: 02-28577979 FAX: 02-28579292

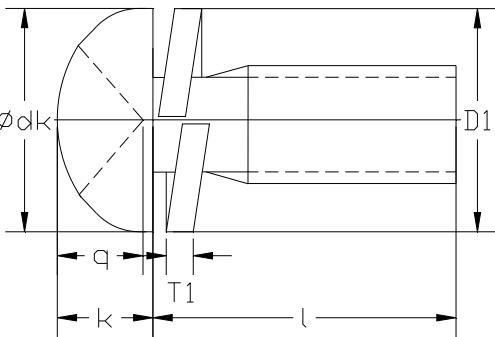

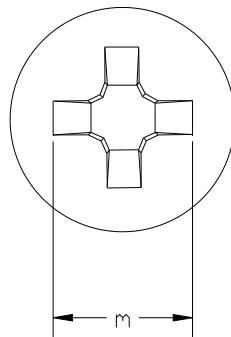

三等企高有限公司
TEL: 02-28577979 FAX: 02-28579292

單位 mm

| d | | M2 | M2.5 | M3 | (M3.5) | M4 | M5 | M6 | M8 |
|------|---------------------|----------------|-------------|--------------|-------------|-------------|-------------|--------------|--------------|
| 平華司 | d _k | 3.5 -0.4 | 4.5 -0.4 | 5.5 -0.5 | 6 -0.5 | 7 -0.5 | 9 -0.6 | 10.5 -0.7 | 14 -0.8 |
| | k | 1.3±0.1 | 1.7±0.1 | 2±0.15 | 2.3±0.15 | 2.6±0.15 | 3.3±0.15 | 3.9±0.2 | 5.2±0.2 |
| | 十字穴 | 十字穴番號 | 1 | 1 | 2 | 2 | 2 | 3 | 3 |
| | m (參考) | 2.2 | 2.6 | 3.6 | 3.9 | 4.2 | 1.9 | 6.3 | 7.8 |
| 彈簧華司 | P十 | D ₁ | 4.3 -0.3 | 5 -0.35 | 6 -0.35 | 7 -0.35 | 8 -0.35 | 10 -0.35 | 11.5 -0.4 |
| | T | | 0.3±0.04 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.8±0.1 | 1.0±0.1 | 1.6±0.15 |
| | T十 | D ₁ | 5 -0.3 | 6.5 -0.35 | 7 -0.35 | 9 -0.35 | 9 -0.35 | 10 -0.35 | 12.5 -0.4 |
| | T | | 0.3±0.04 | 0.5±0.05 | 0.5±0.05 | 0.5±0.05 | 0.8±0.1 | 1±0.1 | 1.6±0.15 |
| 外齒華司 | D ₁ (最大) | | 4 | 4.8 | 5.5 | 6.2 | 7 | 8.5 | 11.5 |
| | B' (最大) × T (最小) | 0.9 × 0.5 | 1 × 0.6 | 1.1 × 0.7 | 1.2 × 0.8 | 1.4 × 1 | 1.7 × 1.3 | 2.7 × 1.5 | 3.2 × 2 |
| | 壓縮試驗 (最小) | | 0.85 | 1 | 1.2 | 1.35 | 1.7 | 2.2 | 2.5 |
| 內齒華司 | D ₁ | | 4.8 -0.3 | 5.7 -0.3 | 6.5 -0.4 | 7.5 -0.4 | 8.5 -0.4 | 10 -0.4 | 11 -0.5 |
| | T | | 0.30±0.025 | 0.30±0.025 | 0.45±0.035 | 0.45±0.035 | 0.45±0.035 | 0.6±0.04 | 0.6±0.04 |
| | 齒數 (17) | | 8 | 8 | 8 | 8 | 9 | 10 | 12 |
| 皿型華司 | D4 | | 4.8 -0.3 | 5.7 -0.3 | 6.5 -0.4 | 7.5 -0.4 | 8.5 -0.4 | 10 -0.4 | 11 -0.5 |
| | T4 | | 0.30±0.025 | 0.30±0.025 | 0.45±0.035 | 0.45±0.035 | 0.45±0.035 | 0.6±0.04 | 0.6±0.04 |
| | 齒數 (17) | | 7 | 7 | 8 | 8 | 8 | 9 | 9 |
| 彈簧華司 | D ₅ | | — | — | 7 -0.25 | — | 9 -0.25 | 10 -0.25 | 12.5 -0.3 |
| | T5 | | — | — | 0.5±0.035 | — | 0.7±0.045 | 0.8±0.05 | 1±0.055 |
| | 試驗後的高 (最小) | | — | — | 0.6 | — | 0.8 | 0.9 | 1.15 |

參考資料：

- 參考 JIS B1188
- 彈簧華司參考 JIS B1251
- 外(內)齒華司參考 JIS B1255
- 皿型華司參考 JIS B1252